





Umake PT Series

LED Poster Display

Umake PT1.86

Product Features:

- Ultra- thin & slim
- GOB protection technique
- Front maintenance, fast and simple
- Intelligent module & management

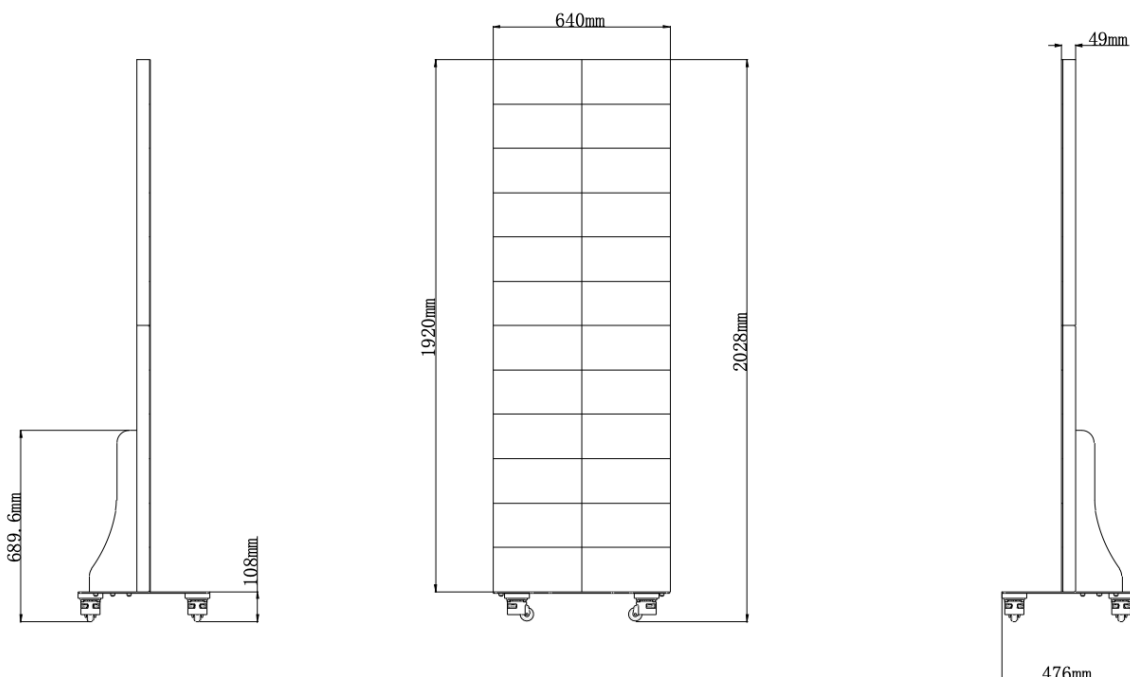

SPECIFICATION PARAMETERS:

Specification	Umake PT1.86
Pixel Pitch	1.86 mm
LED Type	SMD1515
Module Size	320mm*160mm
Cabinet Resolution	344*1032
Cabinet Size	640mm*1920mm
Cabinet Material	Die-casting
Poster Dimensions	640x471x2080mm (Includes mobile base)
Poster Weight	51.6kg/set
Brightness	600cd/m ²
Color depth	14bit
Operation power voltage	AC 220-240V,50/60Hz
Peak Power Consumption	480W/Cabinet
Average Power Consumption	160W/Cabinet
Control mode	WIFI/LAN
Interface	HDMI OUT1.3*1/HDMI IN1.3*1/USB3.0*1/LAN*1/Audio OUT*1
Serviceability	Front
Protection	IP30
Operation Temperature	-10°C~+60°C/10%~90%
Storage Temperature	-40°C~+80°C/10%~90%

Note:

1. Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product;
2. The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.